

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**



The  
Patent  
Office

PCT/GB 99/03425



INVESTOR IN PEOPLE

08/807857

GB 99/3425

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

REC'D 23 FEB 2000  
WPO PCT  
The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

gju

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*W. Evans*

Dated 16 February 2000

**THIS PAGE BLANK (USPTO)**



The  
Patent  
Office



INVESTOR IN PEOPLE

GB9823190.5

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

TANDBERG TELEVISION ASA  
PO Box 322  
Phillip Pedersens vei 20  
1326 Lysaker  
Norway


Incorporated in Norway

[ADP No. 07779903001]



Patents Form 1/77

Patents Act 1977  
(Rule 16)

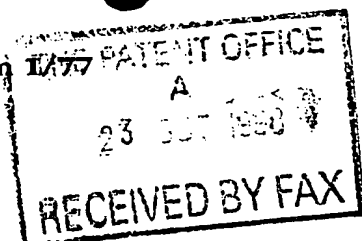

The  
Patent  
Office

23OCT98 E399758-1 003014  
F01/7700 0357 - 9823190.5

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

98-38 GB/RS

2. Pa  
(n)

9823190.5

23 OCT 1998

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NDS Limited  
1 Heathrow Boulevard  
286 Bath Road  
West Drayton  
Middlesex  
UB7 0DQ  
United Kingdom

Patents ADP number (if you know it)

SECTION 48(1)(a)

If the applicant is a corporate body, give the country/state of its incorporation

7183163001

4. Title of the invention

Method and Apparatus for Reducing Distortion of Digital Data

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Dr Rosemarie Stoakes  
NDS Limited  
Stoneham Rectory  
Stoneham Lane  
Eastleigh  
Hampshire  
SO50 9NW

Patents ADP number (if you know it)

74-86012001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)


8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

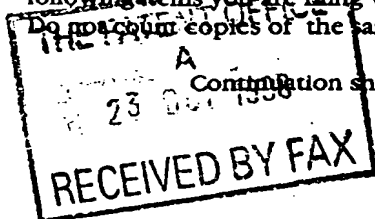

Continuation sheets of this form

Description	12	✓
Claim(s)	3	✓
Abstract	1	✓
Drawing(s)	14	✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 23/10/98

12. Name and daytime telephone number of person to contact in the United Kingdom

Adam Franks

(01703) 573026

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



## METHOD AND APPARATUS FOR REDUCING DISTORTION OF DIGITAL DATA

This invention relates to the transmission of digital data, and in particular to  
5 method and apparatus for reduction of distortion incurred by representations  
of digital data during passage through transmission links.

It is well known in the field of transmission of digital data, and particularly for  
transmission of data concerning digital broadcast material, for modulation  
10 techniques to use symbols, arranged as points in a particular constellation  
pattern, to represent digital data. Typical techniques are those of Phase Shift  
Keying (PSK) and Quadrature Amplitude Modulation (QAM). Two of the more  
common schemes of these techniques are those of Quadrature PSK (QPSK),  
e.g. digital satellite transmission for "direct to home" applications, and 8PSK  
15 for e.g. satellite news gathering applications. There is a recognised desire to  
utilise higher order modulation schemes, such as 16 PSK and 16QAM. This  
will allow transmission at a higher bit rate, thus providing the opportunity to  
carry a greater number of channels within the pre-defined bandwidth of a  
particular transmission link.

20

Transmission of a modulated signal through transmission links such as  
terrestrial, satellite or cable links results in a distortion of the signal. This  
distortion is due, in part at least, to the non-linear effects of passage of a  
signal through the transmission link. Distortion leads to a change in location  
25 of the constellation points of any given modulation scheme. An increase in  
the order of modulation results in a decrease in the distance between  
constellation points, and so leads to a higher probability of distortion leading to  
errors occurring during the demodulation of higher order modulation schemes.

30 Prior art methods used to reduce the effects of distortion by non-linear  
component(s) within transmission links include use of at least partially  
compensating pre-correction. One approach is that of feed-forward, where  
the non-linear output of an amplifier is sampled, and compared with the

required signal prior to transmission, with the resultant error being subtracted from the amplifier output. This approach is only suitable for systems in which the pre-distorter and amplifier are co-located. Thus, where this technique is used for satellite transmission links the opportunity for introduction or  
5 modification of the pre-distorter to take account of changes in amplifier characteristics is severely limited.

Another technique is that of constellation pre-distortion, where the constellation points generated by the modulator are pre-distorted such that at  
10 the amplifier output the constellation points are located in their correct relative positions. This method is suitable only for transmission links that are memory-less. This precludes the use of this approach where pulse shaping takes place before non-linear amplification of the signal. Therefore, it is not suitable for those transmission links that include band pass filtering of the signal.

15 Signal pre-distortion performed at the radio (RF), intermediate (IF) or base band frequencies is often carried out by application of an inverse function of the distortion to the signal. This type of pre-correction generates out of band components, which are then carried through to the amplifier input. Where the  
20 amplifier has an input filter, as is common for amplifiers used in satellite transmission links, then these components may be removed from the signal which becomes the input to the amplifier. Thus, the distortion imposed by the amplifier will not be accurately corrected as the amplifier input signal is not the entire transmitted signal. This means that this form of pre-correction is not  
25 effective for correction of amplifiers contained within satellite transponders where the bandwidth of the incoming signal is high in relation to the bandwidth of the transponder. Additionally, for digital transmission using higher order modulation schemes, this type of pre-correction requires very high clocking rates in order to generate the wide-band pre-distortion components.

30 It is an object of the present invention to overcome at least some of the problems associated with the prior art.

3

According to this invention there is provided a method of pre-distortion a signal, modulated to carry symbols representative of digital data, so as to offset later distortion of the signal during transmission across a transmission link, the method comprising passing the signal through a cascade of pre-distorting stages, each of which generates an approximation of the required pre-distortion, each successive stage receiving the approximation from the preceding stage so that the errors in successive approximations converge.

According to a second aspect of this invention there is provided apparatus for pre-distortion of a signal, modulated to carry symbols representative of digital data, so as to offset later distortion of the signal during transmission across a transmission link, the apparatus comprising a cascade of pre-distorting stages, each of which generates an approximation of the required pre-distortion, each successive stage receiving the approximation from the preceding stage so that the errors in successive approximations converge.

The method and apparatus of this invention allows input of a complex signal at a rate as low as one sample per symbol to the pre-distorter, and generating at its output a complex signal which may be at the same rate. This means that implementation of the hardware is practical for systems operating at higher symbol rates.

The method and apparatus of the invention are particularly suited to pre-distortion of a modulated signal which is subsequently transmitted through a satellite transmission link as it provides a ground based means of applying pre-distortion of the amplifier located on the satellite.

It is common for transmission links to include band pass filters between the means of modulating the signal and the amplifier. As is described above, such filters are known to remove at least substantial portions of any out of band components contained within a signal. Additionally, this invention provides accurate pre-distortion for transmission links having one or more band pass filter regardless of the location of such filter(s). Satellite

4

transmission links commonly employ ground and satellite-based band pass filters.

5 The method and apparatus of this invention allows accurate pre-distortion for a transmission link carrying any constellation pattern and having any non-linear amplifier, irrespective of whether the link is memory-less or not.

10 This allows pre-distortion to be applied to a signal for subsequent transmission through a transmission link having a band pass filter at each of the transmitter and receiver ends of the link. Additionally, by taking past and future symbols of the signal into account, not only can the static positions of the constellation points be pre-distorted accurately to take account of the effects of passage through the non-linearity of the link, but also the effects of inter-symbol interference (i.e. smearing) are substantially reduced.

15

The invention will now be described by way of example only and with reference to the following figures:

20 Figure 1 is a schematic diagram of a satellite transmission system incorporating a satellite transmission link.

Figure 2 is a schematic diagram of a pre-distorter of the present invention.

25 Figure 3 is a schematic diagram of the distorting function FM1 of Figure 2.

Figure 4 is a representation of an ideal 16QAM constellation prior to transmission through a transmission link.

30 Figure 5 is a representation of the output from a receiving Nyquist filter corresponding to the transmission link input of Figure 4.

Figures 6a to 6d show computer simulations of representations of outputs from the TWT of Figure 5 using differing number of stages of successive approximation.

- 5 Figure 7 is a graphical comparison of Bit Error Rates of differing pre-distortion circumstances.

Figures 8a and 8b show the output of a receiver Nyquist filter for 32 QAM using a pre-distorter of the invention, and the corresponding constellation at the input to a transmitter Nyquist filter respectively.

10

Figure 9 shows the computer simulation of an output spectrum, for the TWT of Figure 5 comparing the pre-distortion of this invention with the output without use of pre-distortion.

15

Figure 10 is a schematic diagram of a feedback control loop.

In Figure 1 there is shown a satellite transmission link 1, having a root Nyquist band-pass filter 2, IQ modulator 3 and up-converter 4 prior to a transmitter 5. The transmitter provides an uplink to a satellite 6, which in turn provides a downlink to a number of receivers, one of which is shown as receiver 7. The receiver end of the satellite transmission link 1 can be seen as a reverse of the transmission end, with the receiver 7 connected successively through a down-converter 8, an IQ demodulator 9 and a root Nyquist band-pass filter 10.

20

25

During operation of the transmission link 1, an input base band frequency signal, being one which has been modulated by a particular technique and scheme such as 16 QAM and having I and Q complex components, is filtered by the root Nyquist band-pass filter 2. It is usual to use Nyquist filtering within transmission links in order to constrain the bandwidth of the transmitted signal. Conveniently Nyquist filtering of the signal is conducted by root Nyquist filters placed at each of the transmitter and receiver ends of the

30

6

transmission link. Nyquist and root Nyquist filters impose a linear distortion upon the modulated signal.

Each of the I and Q components of the root Nyquist filtered signal are provided as inputs to the IQ modulator 3 such that the input to up-converter 4 is a modulated carrier which represents the digital data of the chosen modulation scheme. The up-converter changes the frequency of the input signal to a higher frequency than base band. The higher frequency signal is transmitted to satellite 6, where it is received by the satellite's transponder (not shown), amplified by a travelling wave tube amplifier (TWT) and retransmitted from the transponder to a plurality of receivers 7. The transponder is often constructed such as to ensure that the transponder input is passed through band-pass filters before and after being amplified by the TWT. Band-pass filters include the characteristic of not allowing out of band components to pass through the filter.

On receipt of the transponder output by receiver 7 the signal is processed by each of down-converter 8, IQ demodulator 9 and root Nyquist filter 10 to provide an output from the transmission link 1 in the form of a base band frequency signal having I and Q components. This output is then subsequently demodulated to obtain the digital data transmitted by the symbols within the modulation scheme.

In addition to the satellite transmission link 1, Figure 1 also shows a pre-distorter 12 located prior to the transmission link 1. The pre-distorter is adapted to operate in accordance with the invention of this application, and arranged to apply pre-distortion to an incoming signal to compensate for the distortion subsequently applied to that signal during its passage through the satellite transmission link 1.

30

Figure 2 is a block diagram of the pre-distorter 12 in greater detail. It is assumed that all signals (input to, output from and within the pre-distorter) are complex signals. However, it will be understood by those skilled in the art

## 7

that in a practical implementation these signals could be in the form of either cartesian or polar representation. The input signal 19 to the pre-distorter 12 is fed from junction 20 to a forward model of a distorting function 21 to supply symbols representative of digital data for time =  $t(1)$ . The output 22 of this forward model is input along with the input signal 19 (which is arranged to be symbols representative of digital data for time =  $t(1)$  by use of unshown delay apparatus) to summing node 23. The output of summing node 23 is scaled by a value A by multiplier 24. The output of multiplier 24 is combined with input signal 19 (also arranged to supply symbols representative of digital data for time =  $t(1)$  by use of unshown delay apparatus) to summing node 25 to provide an output 26 from the first stage of approximation. This output 26 is determined by equation (1) given below.

$$\text{Output 26} = (\text{input 19}) * A - (\text{output 22}) * A + (\text{input 19})$$

$$\text{Output 26} = [(\text{input 19}) - (\text{output 22})] * A + (\text{input 19}) \quad \text{Equation 1}$$

$[(\text{input 19}) - (\text{output 22})]$  is the error which exists between output 22 and input 19, and therefore

$$\text{Output 26} = (\text{input 19}) - (\text{error} * A) \quad \text{Equation 2}$$

It will be understood that Output 26 concerns symbols representative of digital data for time =  $t(1)$ .

Output 26 acts as the input to forward model 27 of the second stage of successive approximations, and is the same as input 19 to the first stage, but modified by the error scaled by a factor A. It can be seen that the pre-distorter 12 generates an error for symbols representative of digital data for time =  $t(1)$  in relation to the output of forward model 21 of the first stage of the successive approximations but the correction to account for pre-distortion is applied in relation to the input to forward model 27 of the next stage. During passage of symbols representative of digital data for time =  $t(1)$  through the second stage of successive approximation, the first stage of successive approximation is

8

supplied at junction 20 with symbols representative of digital data for time =  $t(1+n)$  where  $n$  represents the pipeline delay.

It can be shown that with a suitable choice of  $A$  the use of successive approximations such as given in the pre-distorter 12 of Figure 2 then the output of the pre-distorter will converge towards zero error as more stages of successive approximation are added. In practice  $A$  is chosen to achieve the highest convergence rate for a given FM1. For a transmission link such as that of Figure 1, then it has been found that six stages of successive approximation strikes a reasonable balance between convergence towards zero error and hardware implementation of the pre-distorter. Optionally, pre-distorter 12 may additionally include an initial approximator 28. This initial approximator is arranged to operate function IM1, which is a function arranged to provide an output which is approximately the inverse of FM1 as implemented by forward models 21, 27 and their equivalents in further successive stages. Where initial approximator 28 is included within a pre-distorter 12, then output 29 is provided as an input to forward model 21 and instead of input 19 fed from junction 20. This is arranged to ensure (through use of appropriate delays to operate for symbols representative of digital data for time =  $t(1)$  as described above. Thus equation (2) becomes

$$\text{Output 26} = (\text{Output 29}) - \text{error} * A$$

Equation 3

For pre-distortion of an amplifier such as a TWT, the approximation function IM1 may be a function which places the constellation points in the correct place for pre-distortion but which does not dynamically change their position from symbol to symbol. This is known as a static pre-distortion. Using a static pre-distortion for a rough approximation substantially reduces the number of successive approximation stages required. Typically one static correction stage plus three dynamic stages (implemented by passage through one successive approximation stage) is sufficient to attain the desired pre-distortion of a satellite transmission link such as that of Figure 1.



The distorting function FM1 for the transmission link 1 of Figure 1 may be of the form shown in Figure 3. This consists of a forward TWT model 30, with root Nyquist filters 31 and 32 placed before and after the model. It is the presence of the root Nyquist filters which enables the pre-distorter 12 to  
5 correct for the signal transitions from one constellation point to another. The practical implementation of the root Nyquist filters enables the summation of scaled sample values. The sample values include both past and future samples. This is the mechanism that enables correction for the effects of distortion upon symbols which rely upon past and future symbols for their later  
10 interpretation during demodulation, i.e. the dynamic distortion. When used in combination with successive approximation this allows for a substantial reduction in the effects of inter-symbol interference.

The method and apparatus of this invention can be adapted in the manner exemplified in this embodiment so as not to generate out of band  
15 components. Instead, the non-linear correction components are folded back into the bandwidth of the signal, and thus provide accurate pre-distortion for transmission links having one or more band pass filters.

20 If it is required that the pre-distorter shall correct additionally for the uplink High Power Amplifier (HPA), then a forward HPA model can also be included in FM1. Alternatively, a completely separate pre-distorter could be used.

As an example of the operation of a pre-distorter, some simulation results are  
25 given in Figs 4 to 9. In this example  $A=0.875 = 7/8$ . The use of simple fractions with a binary denominator reduces hardware complexity. A Nyquist link with 35% roll-off factor is included.

Fig 4 shows an ideal 16QAM constellation 5 to be transmitted with the corner  
30 points placed at TWT saturation and Fig 5 shows the corresponding output from a typical TWT. The constellation points are displaced and additionally they are smudged due to the transition affects caused by the transmit Nyquist filter /TWT combination.

Figures 6a to 6d show the results corresponding to outputs of successive pre-distorter stages. It can be seen, when comparing the results of Figure 6a with those of Figure 5 (no correction by means of a pre-distorter), that passage through just one stage of successive approximation leads to an improvement in the dynamic distortion imposed by a satellite link such as that of Figure 1. The result can be improved by adding further pre-distorter successive approximation stages, as can be seen by comparison of the results of Figures 6b to 6d.

Use of greater numbers of successive approximation stages leads to all points, except for the four corner points, becoming nearer to being substantially ideal following passage through each additional successive approximation stage. The corner points, which are at TWT saturation, exhibit a comet tail effect. This is due to the fact that, at these points, the gain of the TWT is zero and perfect convergence is not possible. Nevertheless the link Bit Error Rate (BER) approaches that of the linear link.

Fig 7 shows a comparison of a satellite transmission link BER for various uncoded modulations with static and dynamic pre-distortion should be noted.

Line 70 represents the BER for a signal modulated by 8PSK and transmitted through a transmission link having no non-linear distortion. Thus, this is also the ideal signal output BER of a transmission link following passage through a pre-distorter. Line 71 represents the same ideal for the different modulation scheme of 16QAM. Line 72 demonstrates the BER of a signal having been modulated by 8PSK and being pre-distorted by the prior art technique of static pre-distortion. Graph lines 73 and 74 represent the BERs of the 16QAM modulated signals having static and dynamic pre-distortion, and static only pre-distortion respectively. It should be noted that a 16QAM modulated signal subjected to both static and dynamic pre-distortion demonstrates better performance than a signal modulated by 8PSK and pre-distorted by the prior art techniques of static only pre-distortion. As explained earlier, higher order

modulation schemes are inherently more susceptible to increased BER due to the decreasing distance between constellation points. Figure 7 thus demonstrates the significant increase in performance associated with use of the pre-distortion method and apparatus of this application.

5

32 QAM is particularly suited to pre-distortion in accordance with this invention because the corner points are missing and all the remaining points pre-correct well. Fig 8a shows the output from a satellite transmission link TWT with pre-distortion using 6 stages of dynamic pre-distortion only.  $A=0.875$  and 35% roll off factor. The corner points that are missing would be at the saturation point of the TWT if they were present. Fig 8b shows the pre-distorter output, which is a 32QAM constellation to be transmitted through a satellite transmission link. Fig 9 shows the output spectrum from the uplink for the case with and without pre-distortion. It is clear that in both cases the spectrum follows the shape of the transmit Nyquist filter and the only difference is that the pre-distorted signal is about 3dB lower in power.

10

15

20

In the above description it has been assumed that the characteristics of the TWT are known and these parameters are programmed into the pre-distortion hardware.

Figure 10 illustrates a block diagram of a feedback control loop, which includes a satellite of satellite transmission link 1, for modification of the pre-distortion parameters of FM1 of Figure 3.

25

The pre-distorter 100 receives its control parameters from microprocessor 101. The required non-linear characteristics are generated by the microprocessor and are down-loaded into RAM in the pre-distorter. Two modes are possible. In the non-feedback mode, it is assumed that the parameters for a particular satellite are known and these are stored in memory 102. The accuracy of pre-distortion will be limited by the accuracy of these parameters.

30

12

In the feedback mode, the satellite output is received by receiver 103 and the constellation analyser 104 generates error signals, which correspond to the displacement of the constellation points. For 16QAM for example the constellation points fall on three circles, so a magnitude and phase error estimate may be made for each of the three circles. The error signals are processed by a software algorithm implemented in the microprocessor to generate updates of the control parameters passed to the pre-distorter.

It will be realised that the time delay of the return path to the satellite is approximately 0.25 seconds, and so the update time of the control parameters must be equal or longer than this delay. However, in practice the TWT parameters will only be slowly varying.

In the feedback mode described above, no training sequence is required. However, if the parameters of the satellite TWT are not known, then the constellation from the TWT may be so distorted that the tracking feedback loop cannot pull into lock.

One solution for this is to add a training sequence into the transmission. An alternative method is to provide a separate training signal. When the up-link is first operational into the satellite, a set up mode in the modulator generates a training signal, which may not be of the same modulation type as the intended transmission. The micro-processor runs an algorithm to calculate the required correction parameters based on the signal from receiver 103. Subsequent to this procedure, transmission of the intended transmission may start and the feedback mode accurately maintains the control parameters. In the case of intermittent loss of the received signal, the corrector continues to correct accurately because the most recent control parameters are stored in memory 102.

**Claims**

- 1 A method of pre-distorting a signal, modulated to carry symbols  
5 representative of digital data , so as to offset later distortion of the  
signal during transmission across a transmission link, the method  
comprising passing the signal through a cascade of pre-distorting  
stages, each of which generates an approximation of the required pre-  
distortion, each successive stage receiving the approximation from the  
10 preceding stage so that errors in successive approximations converge.
- 2 The method of Claim 1 applied to pre-distorting a signal to be  
transmitted across a transmission link having a particular bandwidth  
wherein the signal is passed through a cascade of pre-distorting  
15 stages, each of which generates an approximation within the said  
bandwidth.
- 3 The method of each of Claims 1 or 2 further comprising passing of the  
signal through an initial approximator prior to its passage through  
20 successive approximation stages.
- 4 The method of Claim 3 wherein the initial approximator comprises a  
static pre-distortion approximation function.
- 25 5 The method of any of the preceding claims wherein method is adapted  
for transmission of the signal across a satellite transmission link.
- 6 The method of any preceding claim wherein the signal is modulated in  
accordance with 16 QAM.  
30
- 7 The method of any of Claims 1 to 5 wherein the signal is modulated in  
accordance with 32 QAM.

14

- 8 The method of any of Claims 1 to 5 wherein the signal is modulated in accordance with 16 PSK.
- 9 The method of Claim 5 wherein the satellite of the satellite transmission  
5 link comprises an Travelling Wave Tube amplifier.
- 10 The method of Claim 5 wherein the satellite transmission link includes a Nyquist filter.
- 10 11 The method of Claim 10 wherein the Nyquist filter comprises root Nyquist filters.
- 12 Apparatus for pre-distortion of a signal, modulated to carry symbols representing digital data, so as to offset later distortion of the signal  
15 during transmission across a transmission link, the apparatus comprising a cascade of pre-distorting stages, each of which generates an approximation of the required pre-distortion, each successive stage receiving the approximation from the preceding stage so that the errors in successive approximations converge.
- 20 13 Apparatus according to Claim 12 applied such as to pre-distort a signal to be transmitted across a transmission link having a particular bandwidth, having a cascade of pre-distorting stages, each of which generates an approximation within the said bandwidth.
- 25 14 The apparatus of Claim 13 further comprising an initial approximator.
- 15 Apparatus of Claim 14 wherein the initial approximator comprises a static pre-distortion approximation model.
- 30 16 Apparatus according to any of preceding Claims 12 to 15 wherein the apparatus is adapted for transmission of the signal across a satellite transmission link.

15

- 17 The apparatus of any of preceding Claims 12 to 16 wherein the signal is modulated in accordance with 16 QAM.
- 5 18 The apparatus of any of preceding Claims 12 to 16 wherein the signal is modulated in accordance with 32 QAM.
- 19 Apparatus of any of preceding Claims 12 to 16 wherein the signal is modulated in accordance with 16 PSK.
- 10 20 The apparatus of Claim 16 wherein the satellite of the satellite transmission link comprises an Tunnel Wave Tube amplifier.
- 15 21 The apparatus of Claim 16 wherein the satellite transmission link includes a Nyquist filter.
- 22 The apparatus of Claim 21 wherein the Nyquist filter comprises root Nyquist filters.
- 20 23 The apparatus of Claim 12 adapted for use in accordance with Claim 22 and comprising five successive approximation stages.
- 24 The apparatus of Claim 15 adapted for use in accordance with Claim 22 and comprising three successive approximation stages.
- 25 25 The apparatus of Claim 16 further comprising a feedback control loop.

16

## ABSTRACT

The invention relates to a method and apparatus for reducing the effects  
5 distortion experienced by a modulated signal carrying digital data during  
passage across a transmission link, and is particularly suited to satellite  
transmission links and especially those satellite transmission links intended for  
transmission of signals modulated in accordance with higher order modulation  
schemes. The invention provides method and apparatus capable of pre-  
10 correction of both static and dynamic distortion experienced by modulated  
signals during transmission.

A method of pre-distortion a signal, modulated to carry symbols  
representative of digital data, so as to offset later distortion of the signal during  
15 transmission across a transmission link, the method comprising passing the  
signal through a cascade of pre-distorting stages, each of which generates an  
approximation of the required pre-distortion, each successive stage receiving  
the approximation from the preceding stage so that the errors in successive  
approximations converge.

20

Apparatus for pre-distortion a signal, modulated to carry symbols  
representative of digital data, so as to offset later distortion of the signal during  
transmission across a transmission link, the apparatus comprising a cascade  
of pre-distorting stages, each of which generates an approximation of the  
25 required pre-distortion, each successive stage receiving the approximation  
from the preceding stage so that the errors in successive approximations  
converge.

30



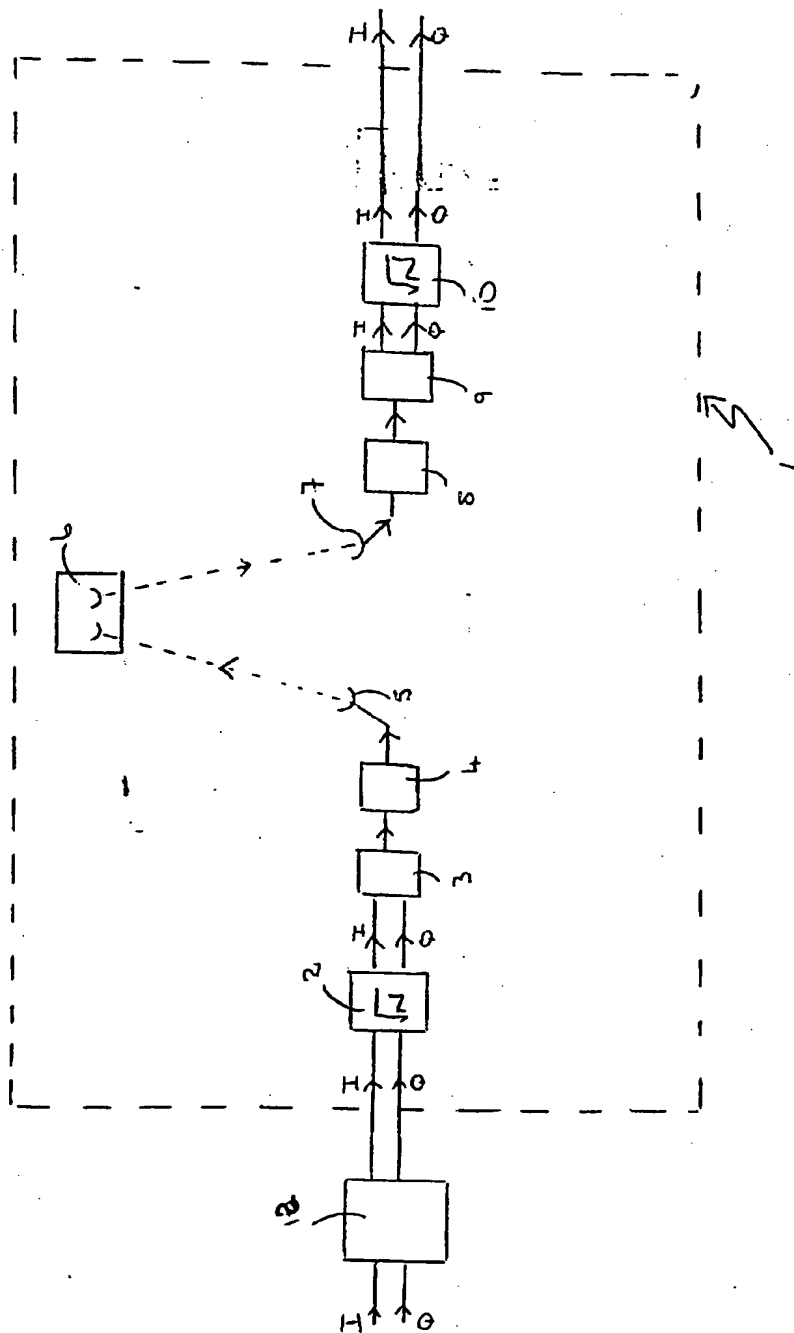


FIGURE 1

**THIS PAGE BLANK (USPTO)**


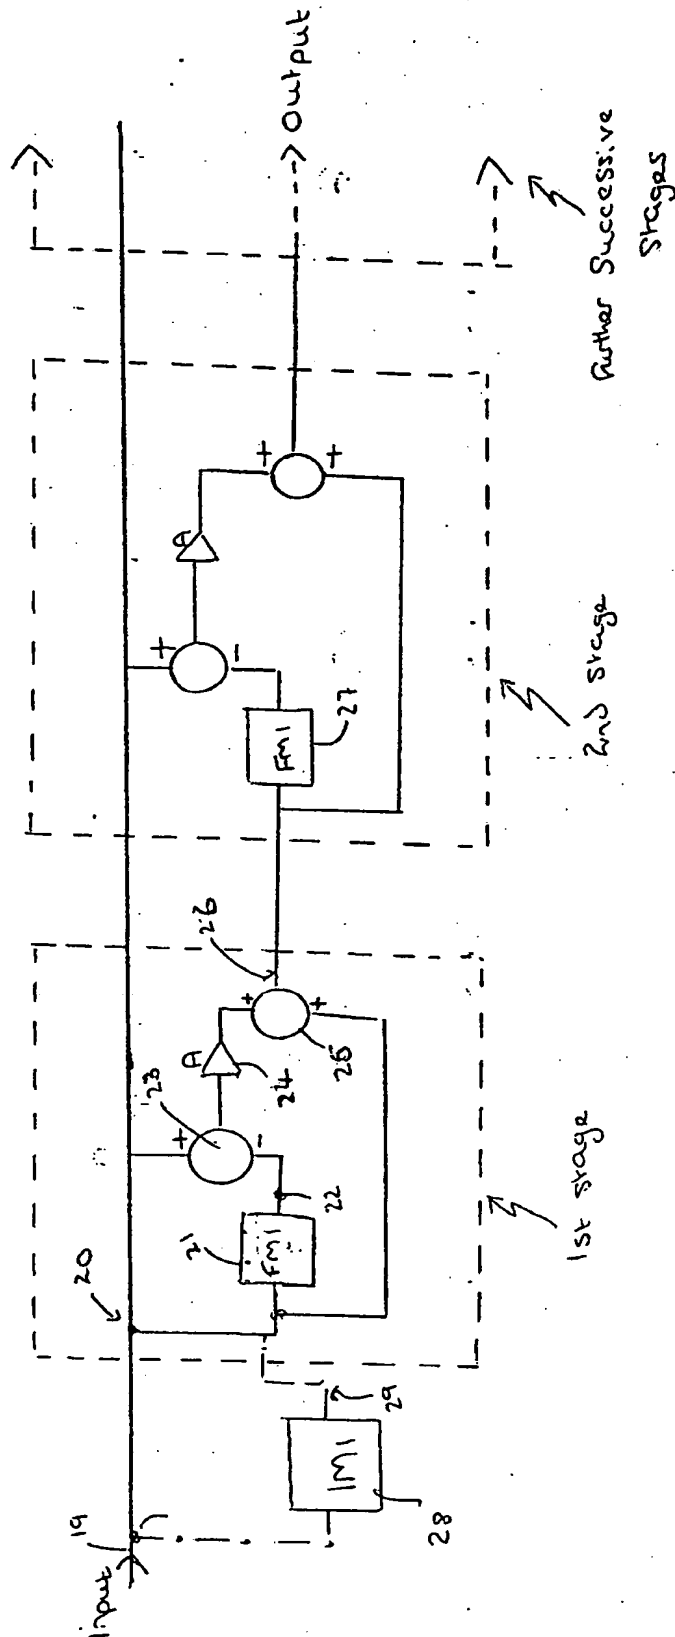


Figure 2


**THIS PAGE BLANK (USPTO)**

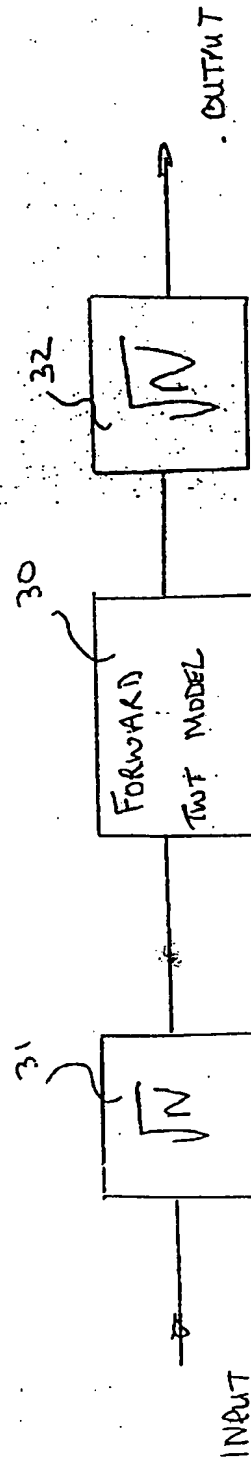

3  
FIG. 3

**THIS PAGE BLANK (USPTO)**

# Constellation of 16QAM

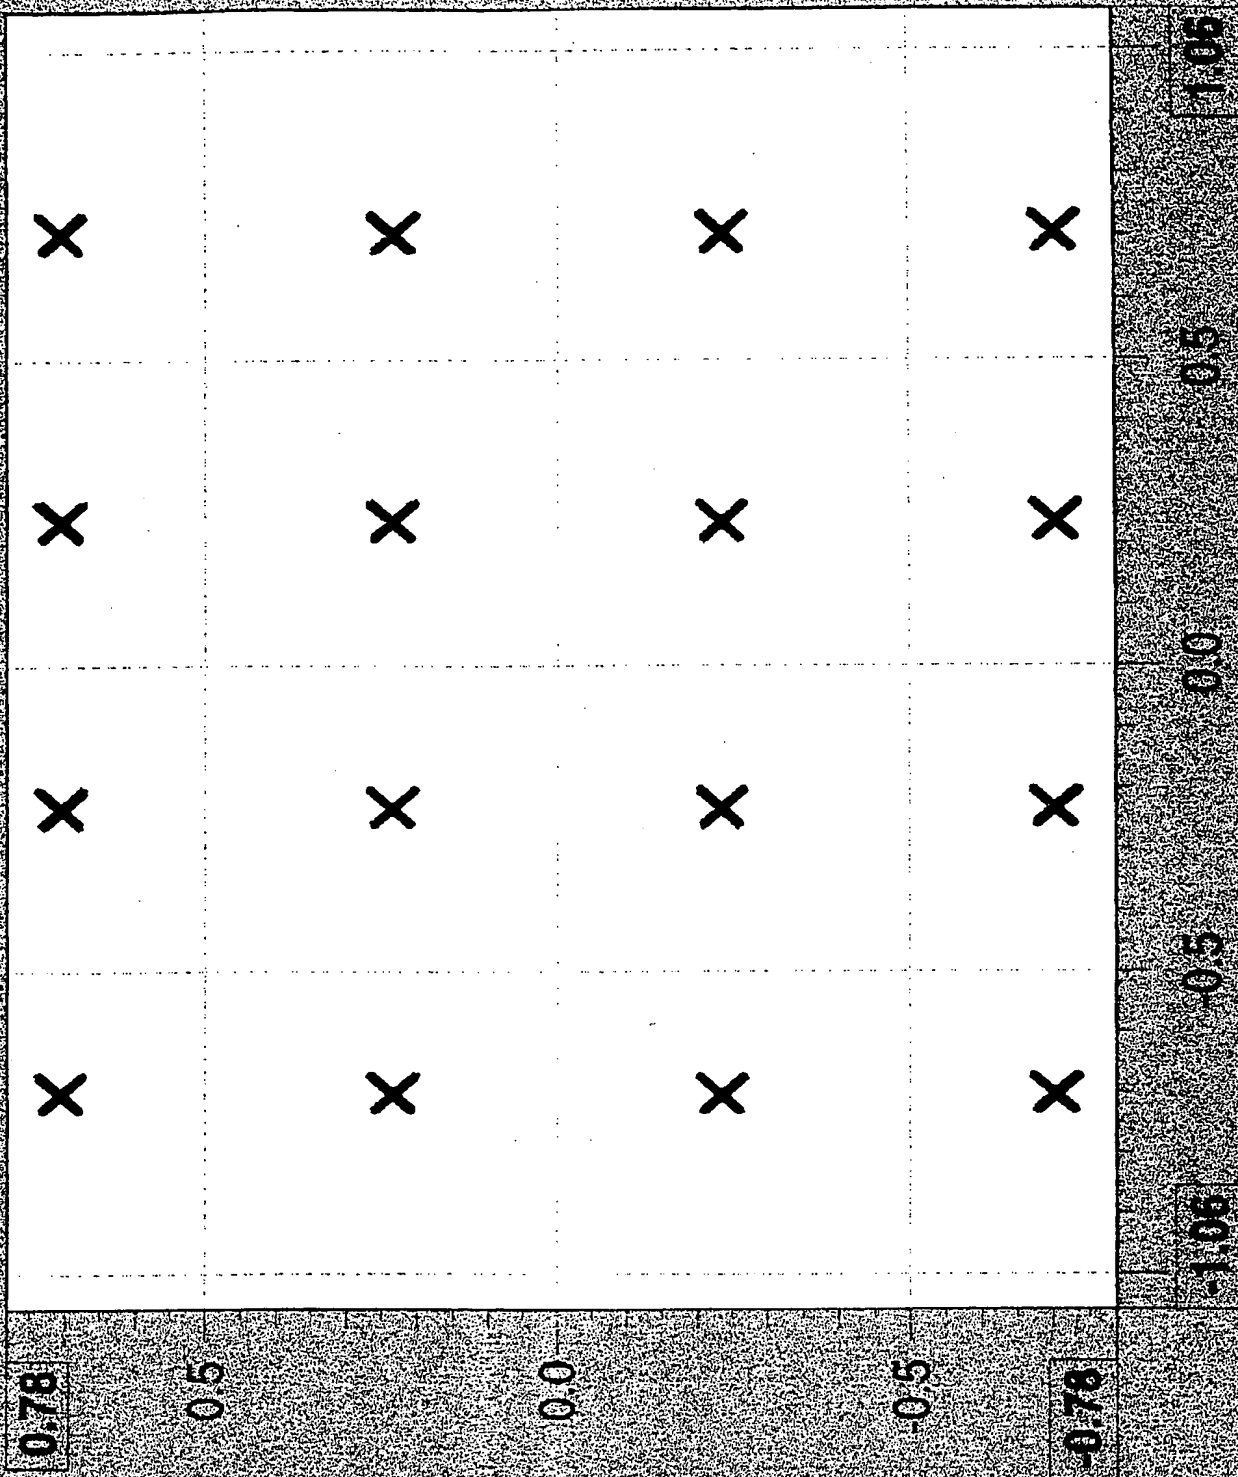


imag part

real part

Figure 1


**THIS PAGE BLANK (USPTO)**



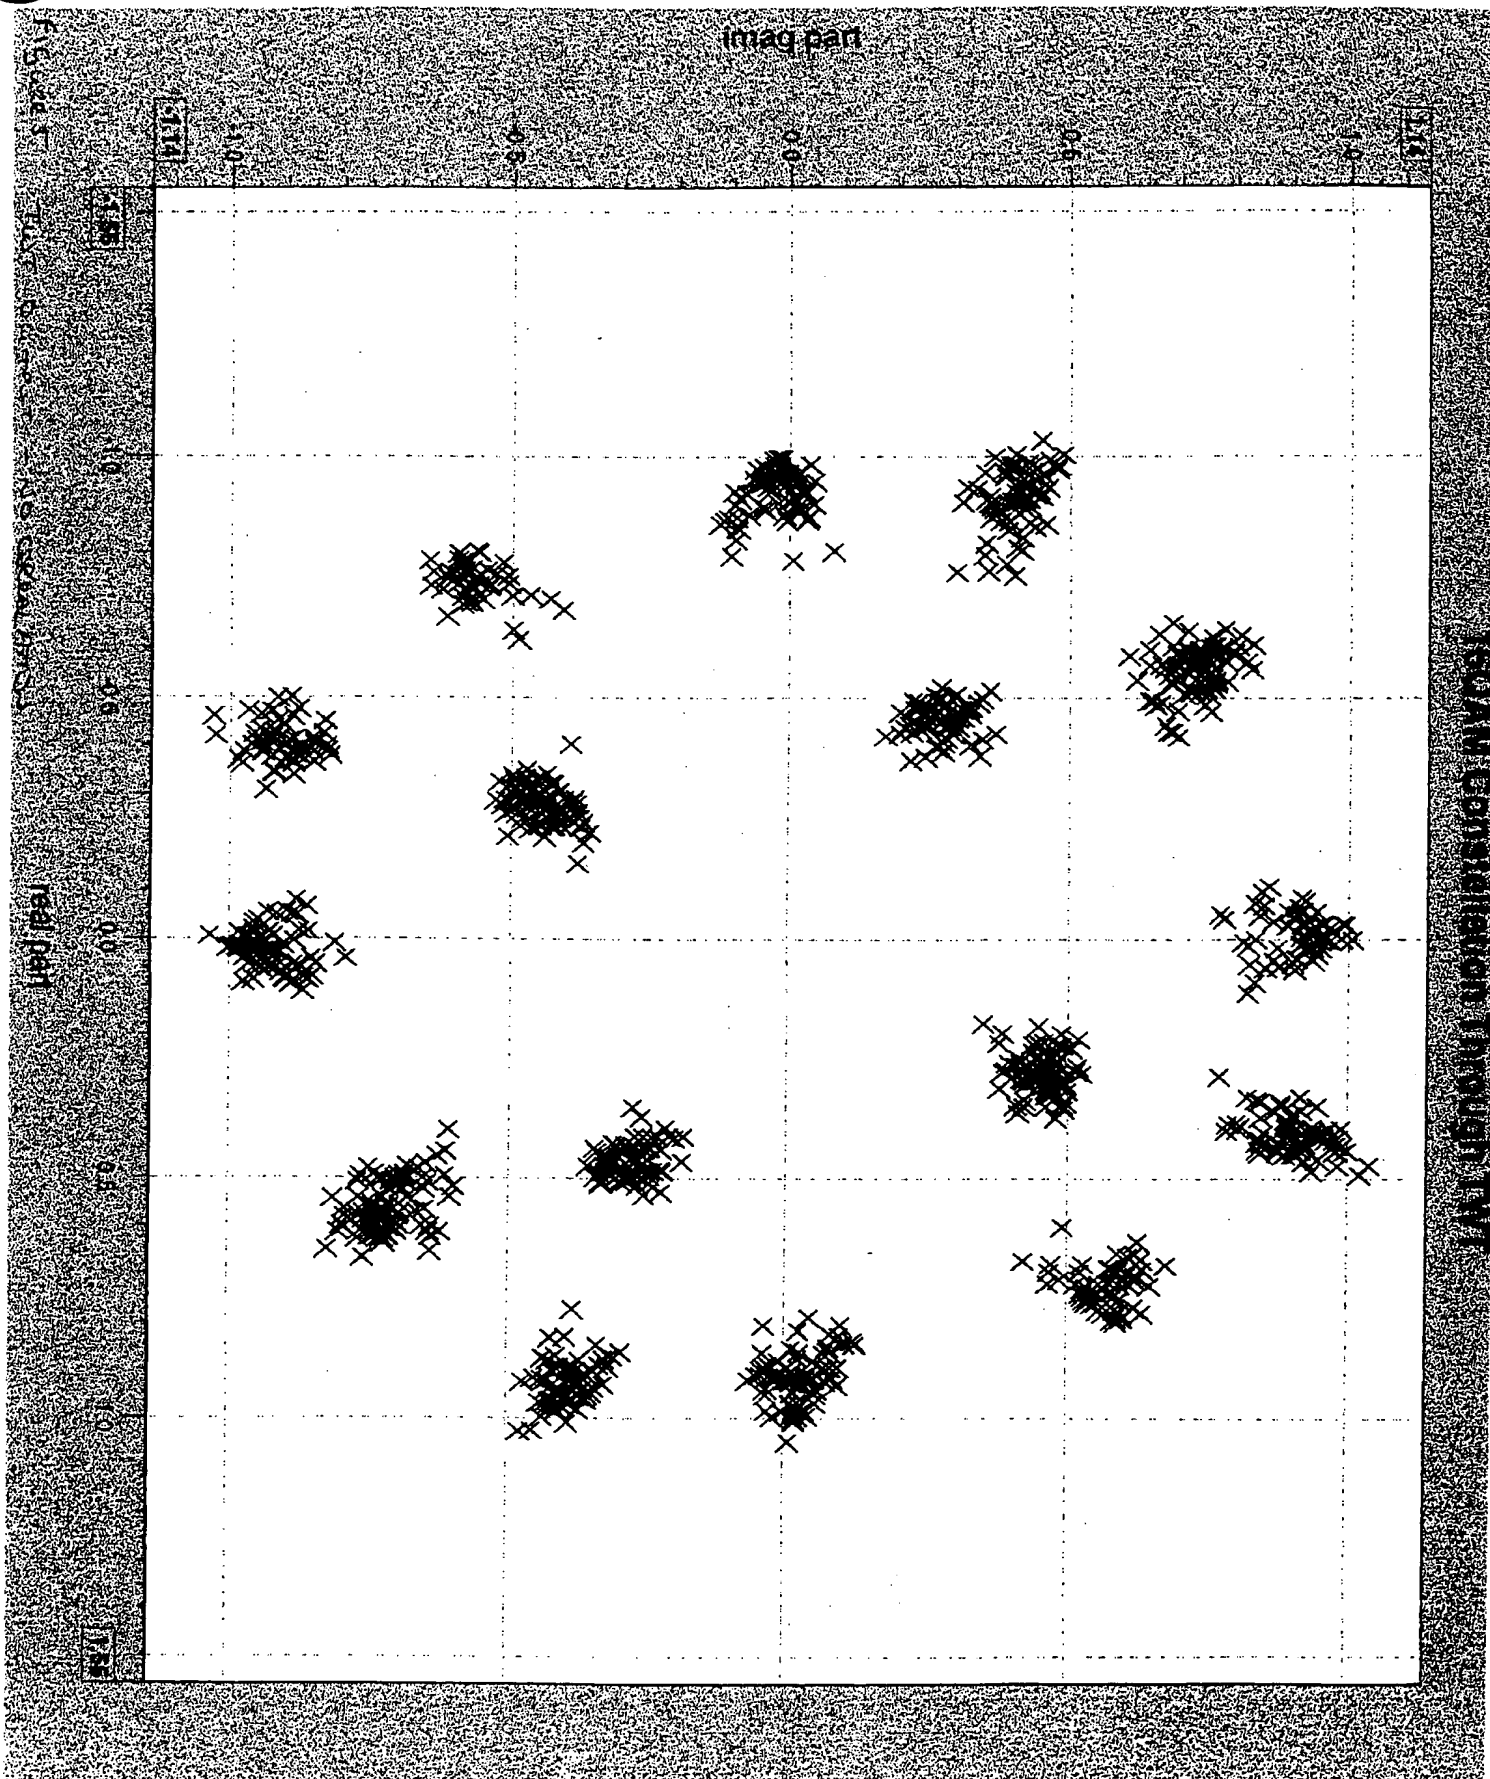


**THIS PAGE BLANK (USPTO)**

imag part

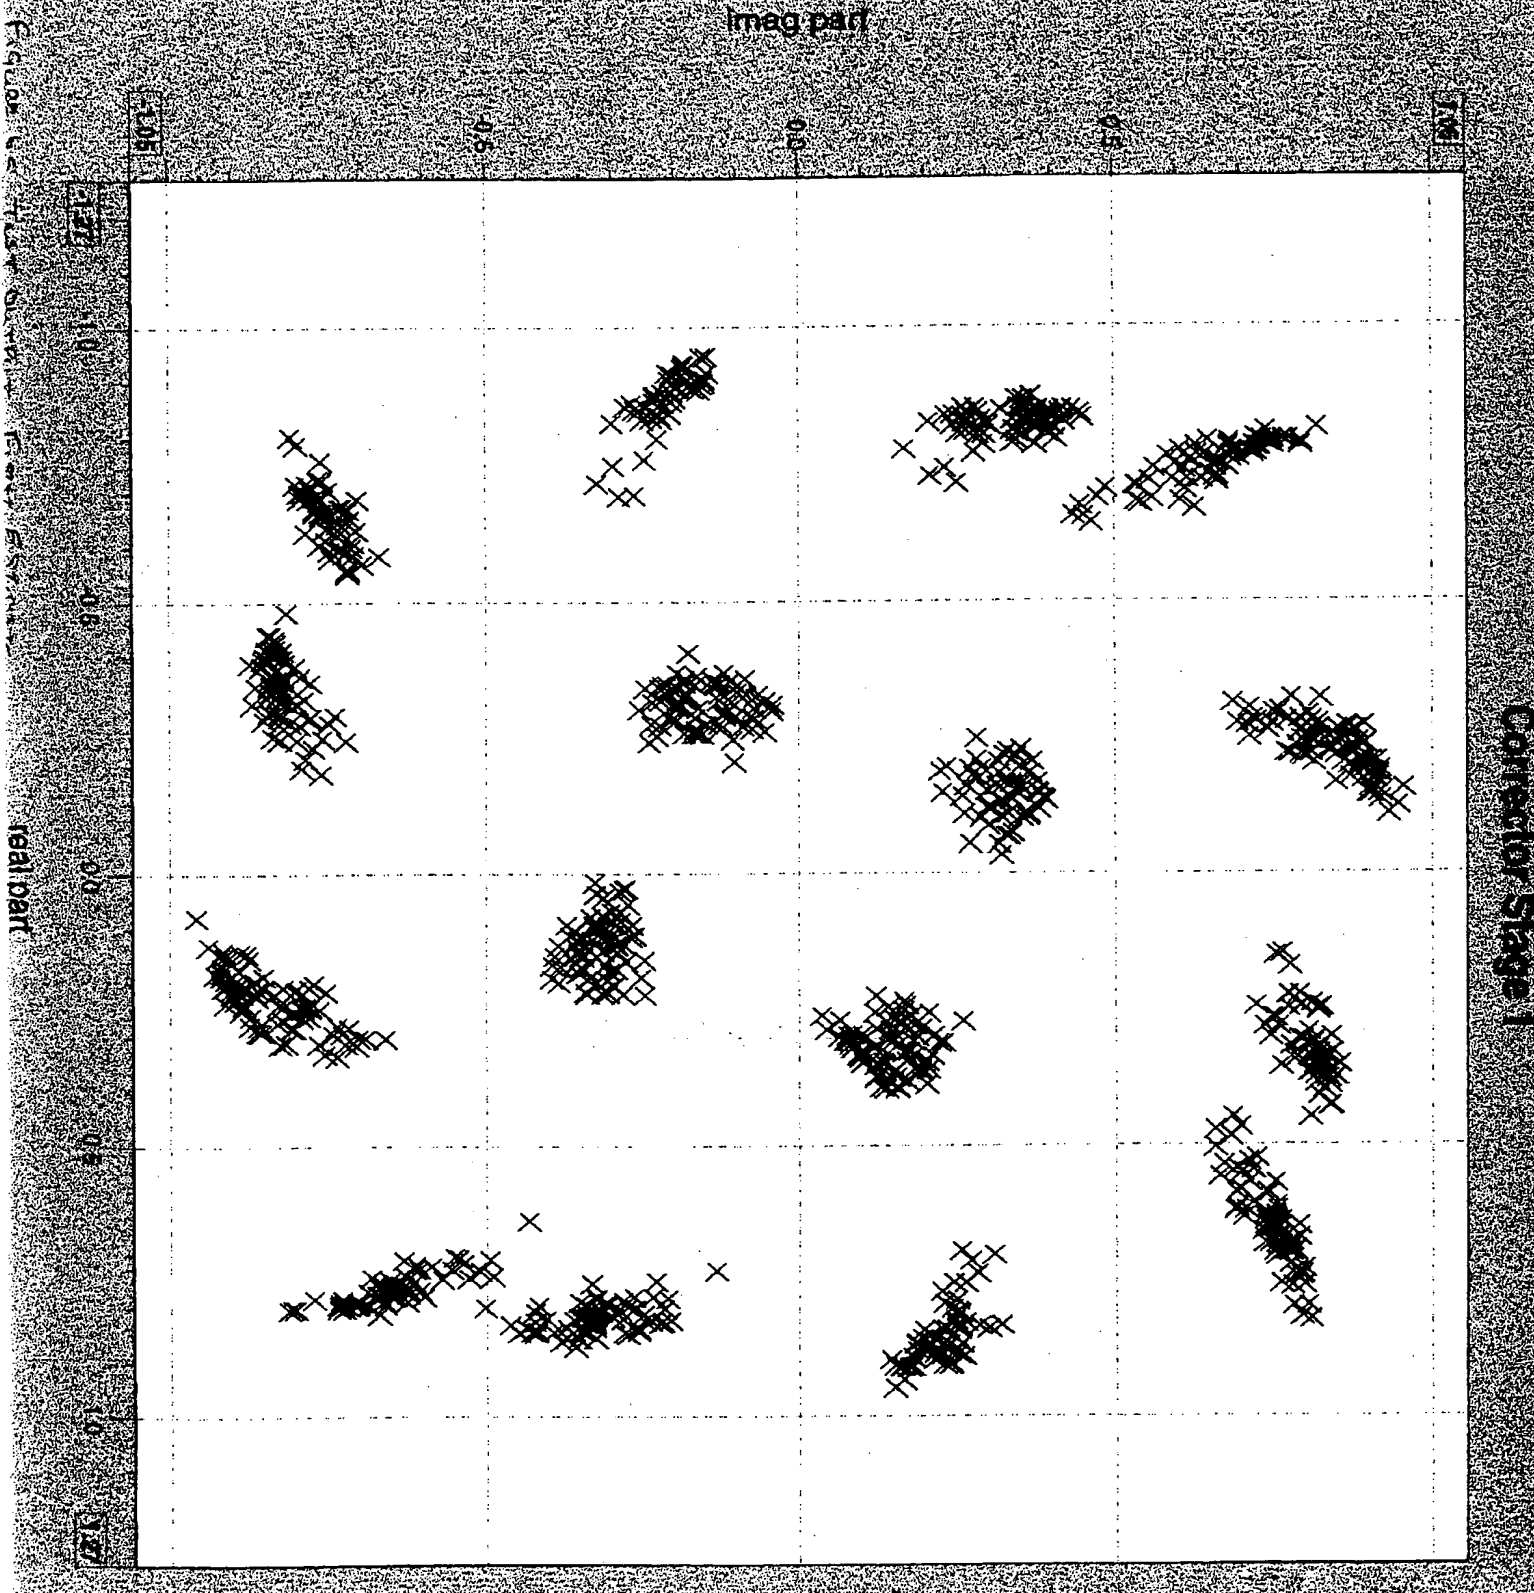


Corrector Stage 1

**THIS PAGE BLANK (USPTO)**

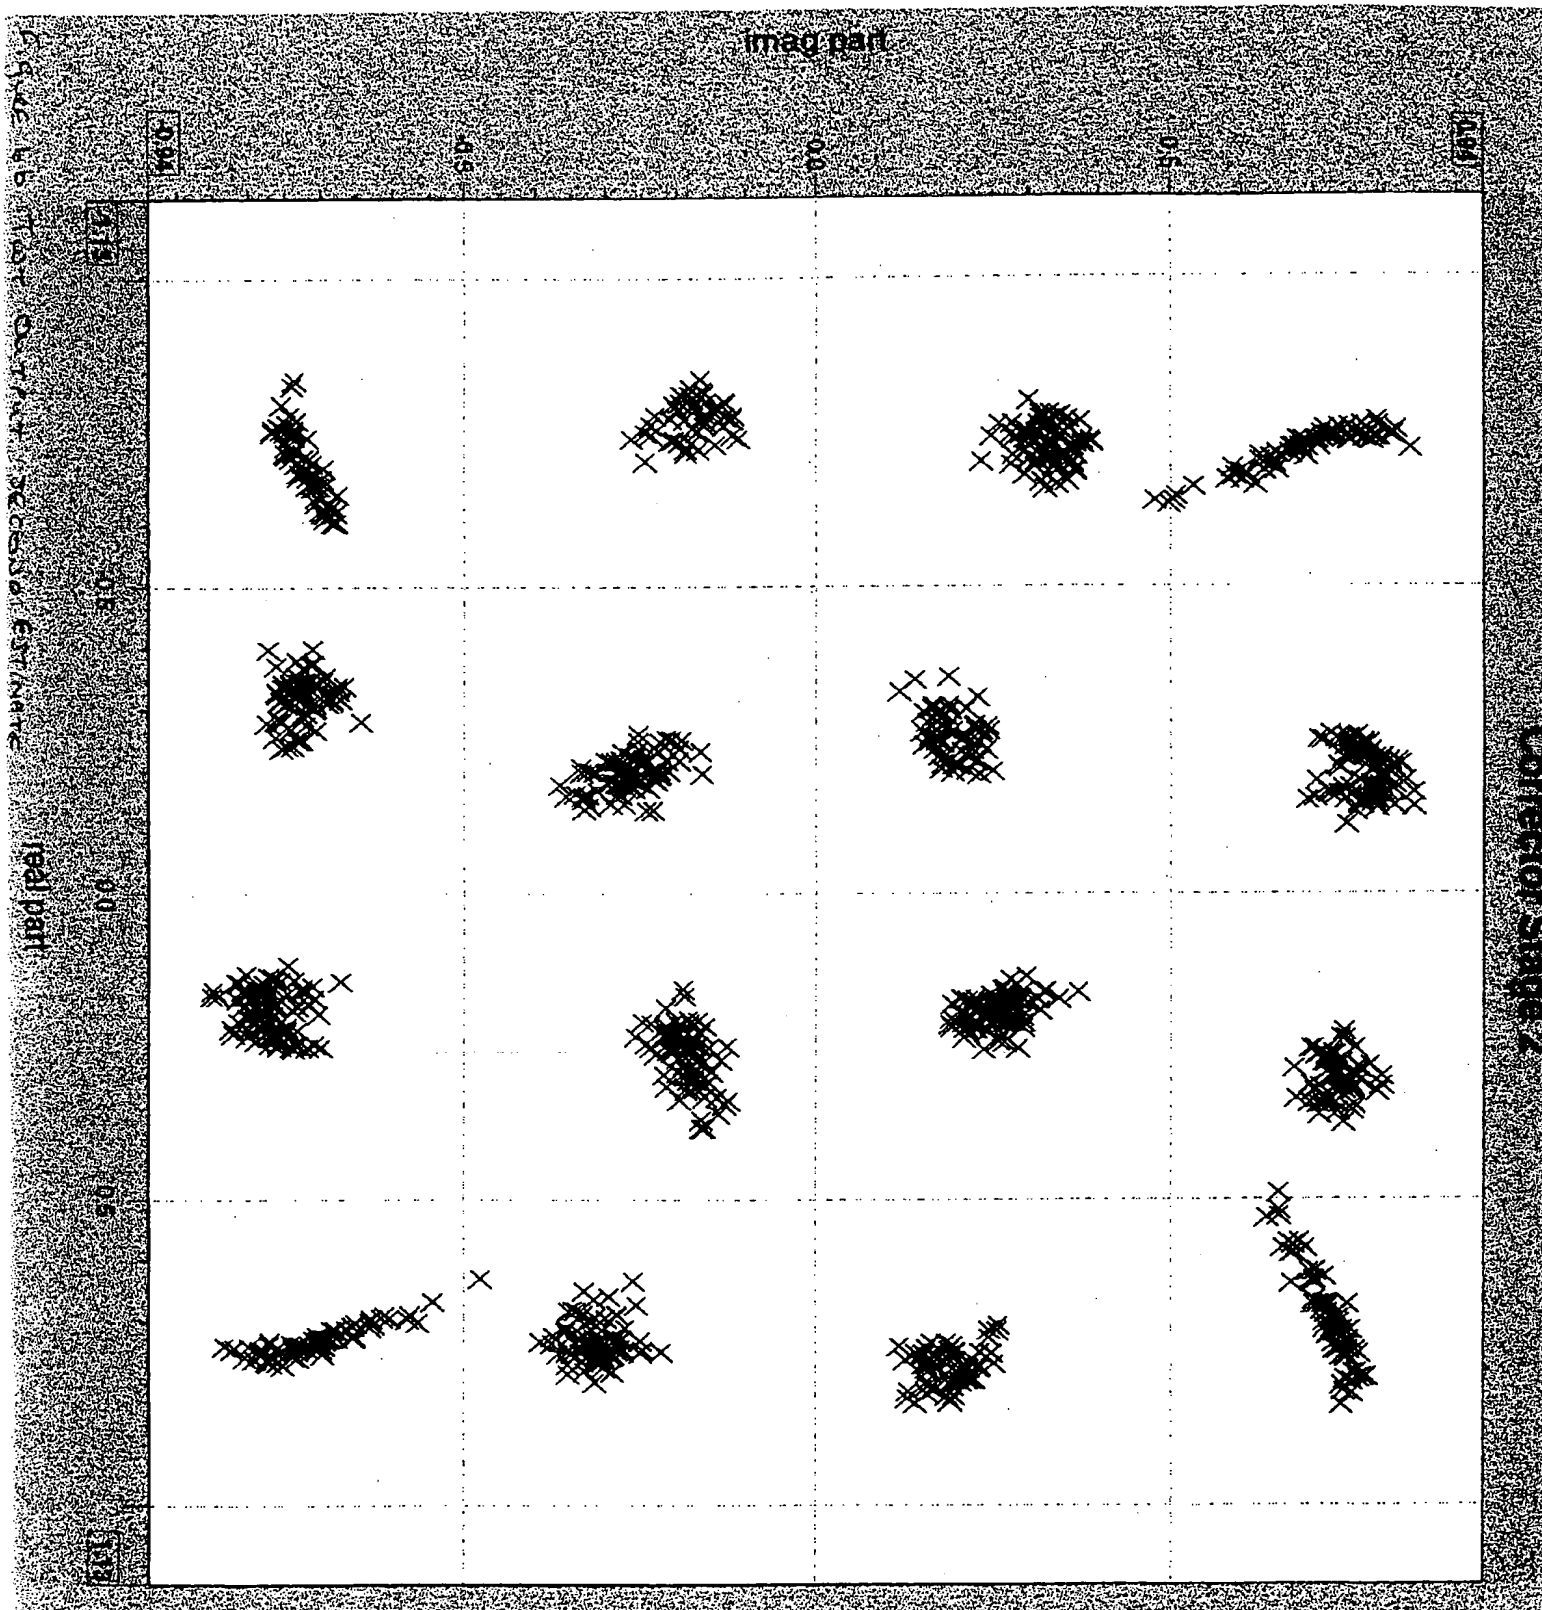


**THIS PAGE BLANK (USPTO)**

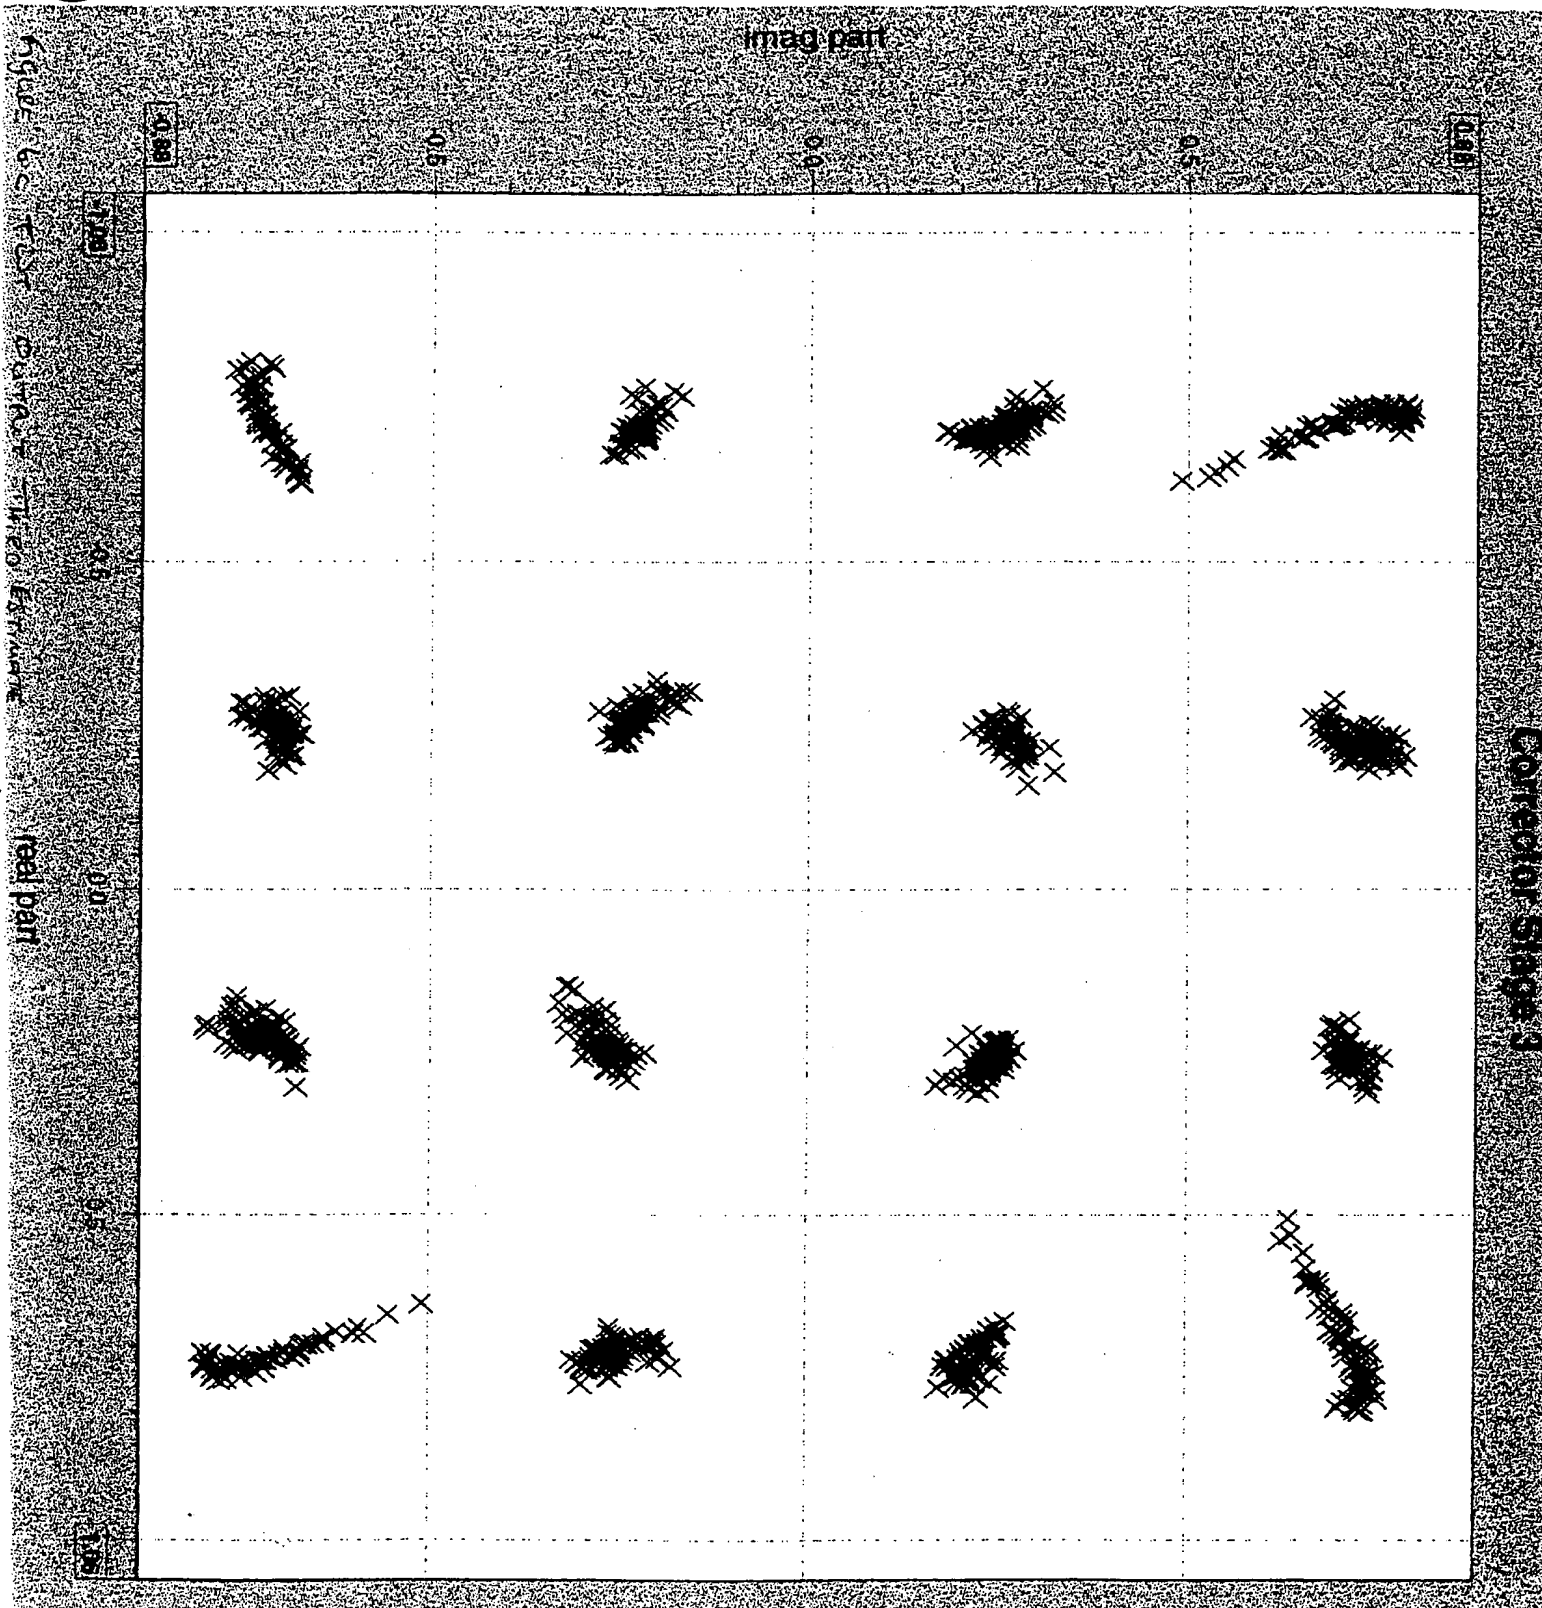

**THIS PAGE BLANK (USPTO)**




imag part

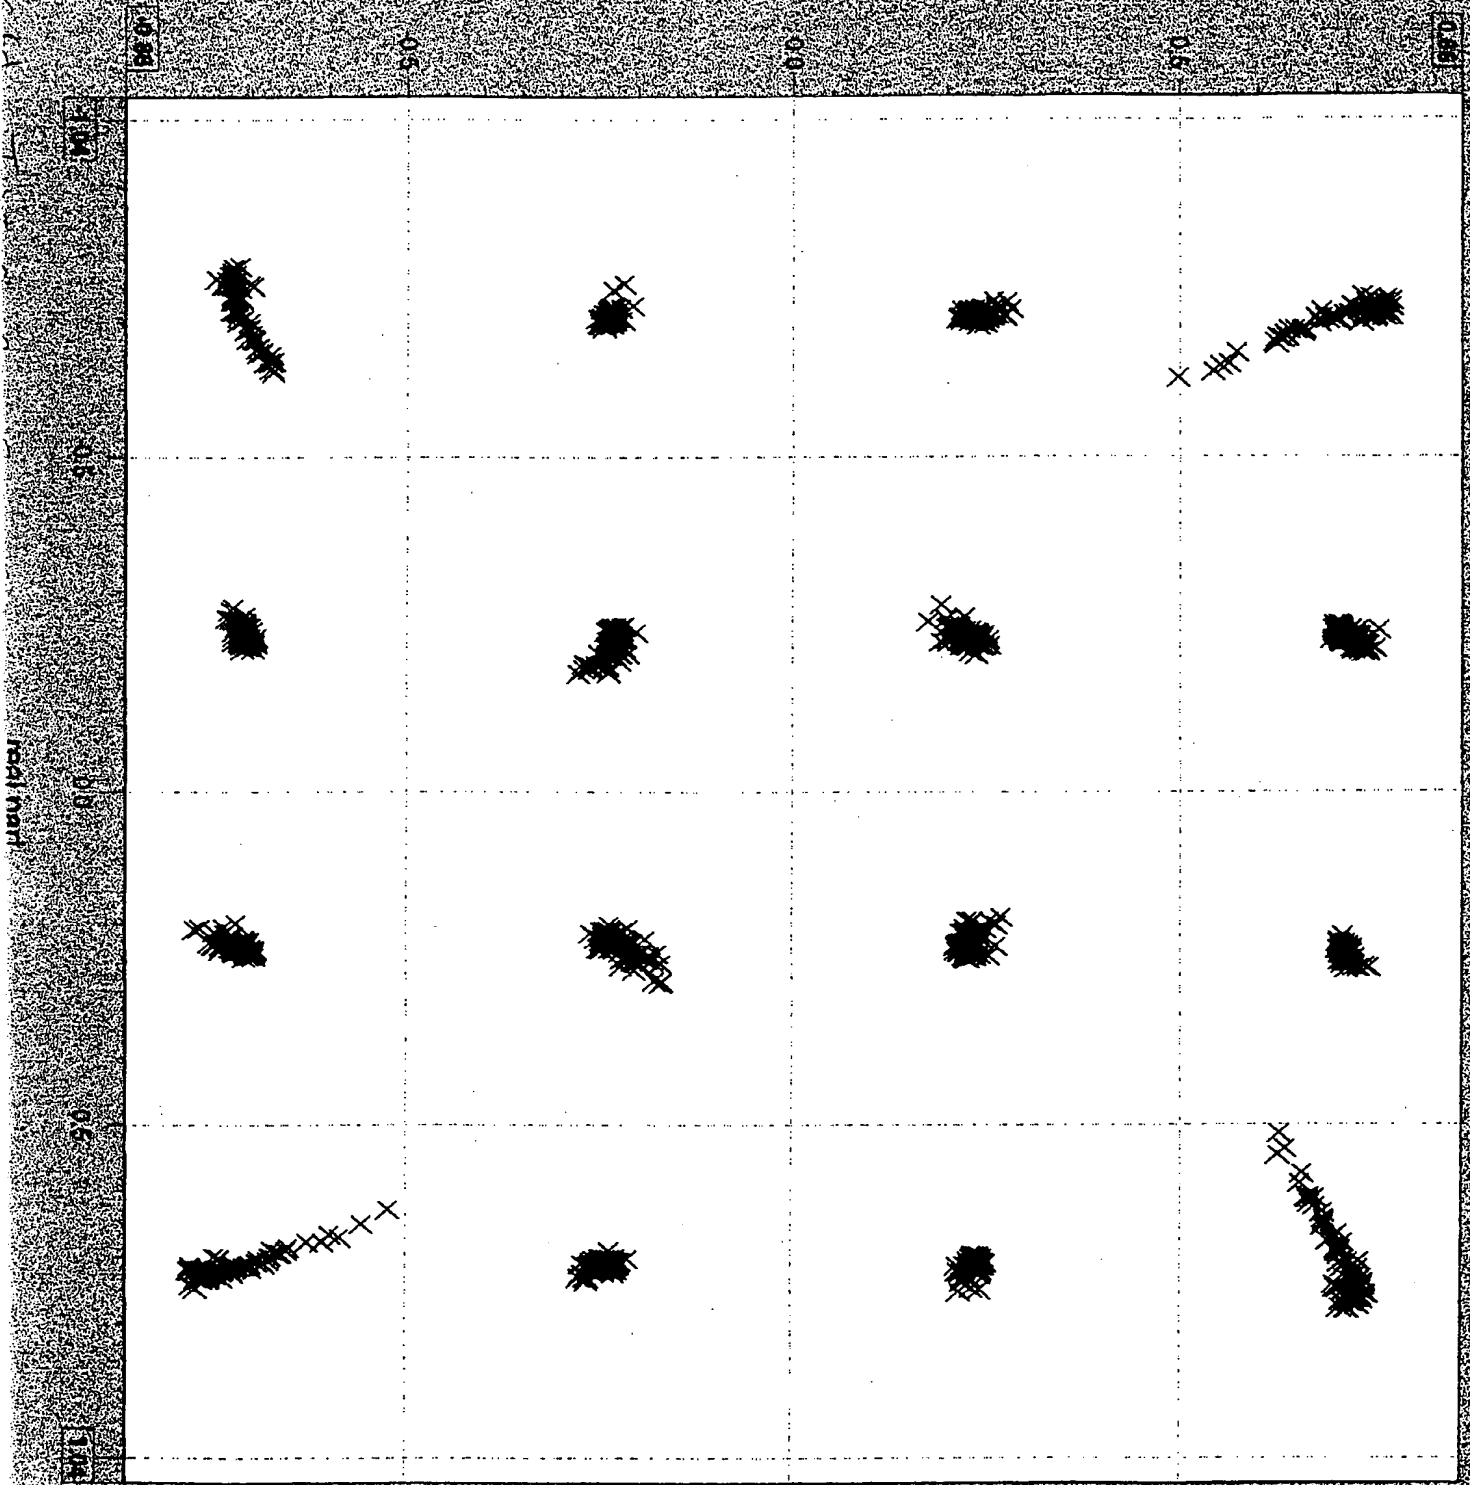

Corrector Stage 4

**THIS PAGE BLANK (USPTO)**

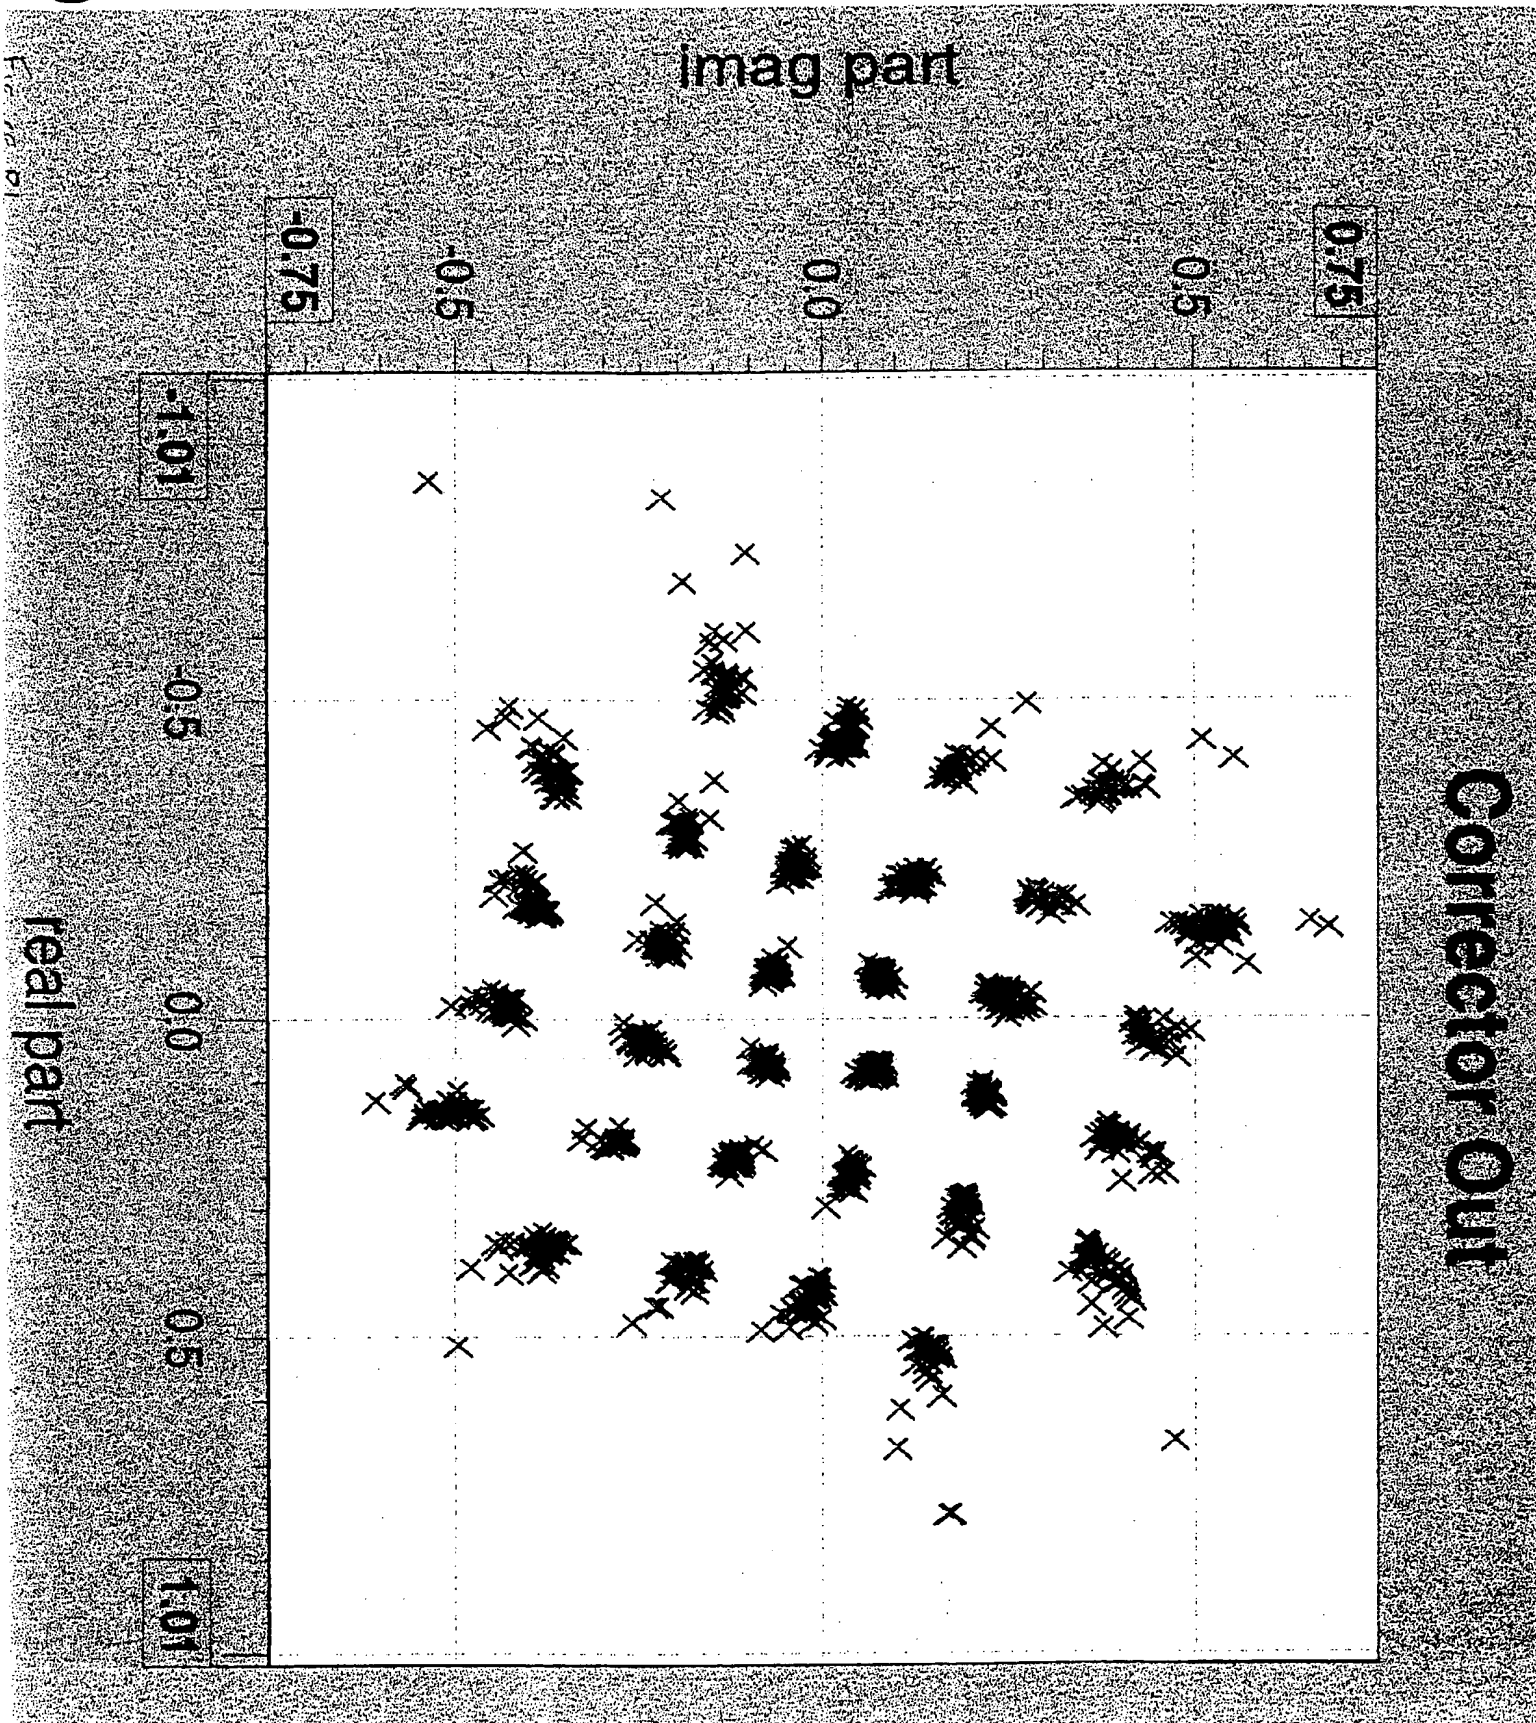


**THIS PAGE BLANK (USPTO)**

imag part


Corrector Stage 6

real part

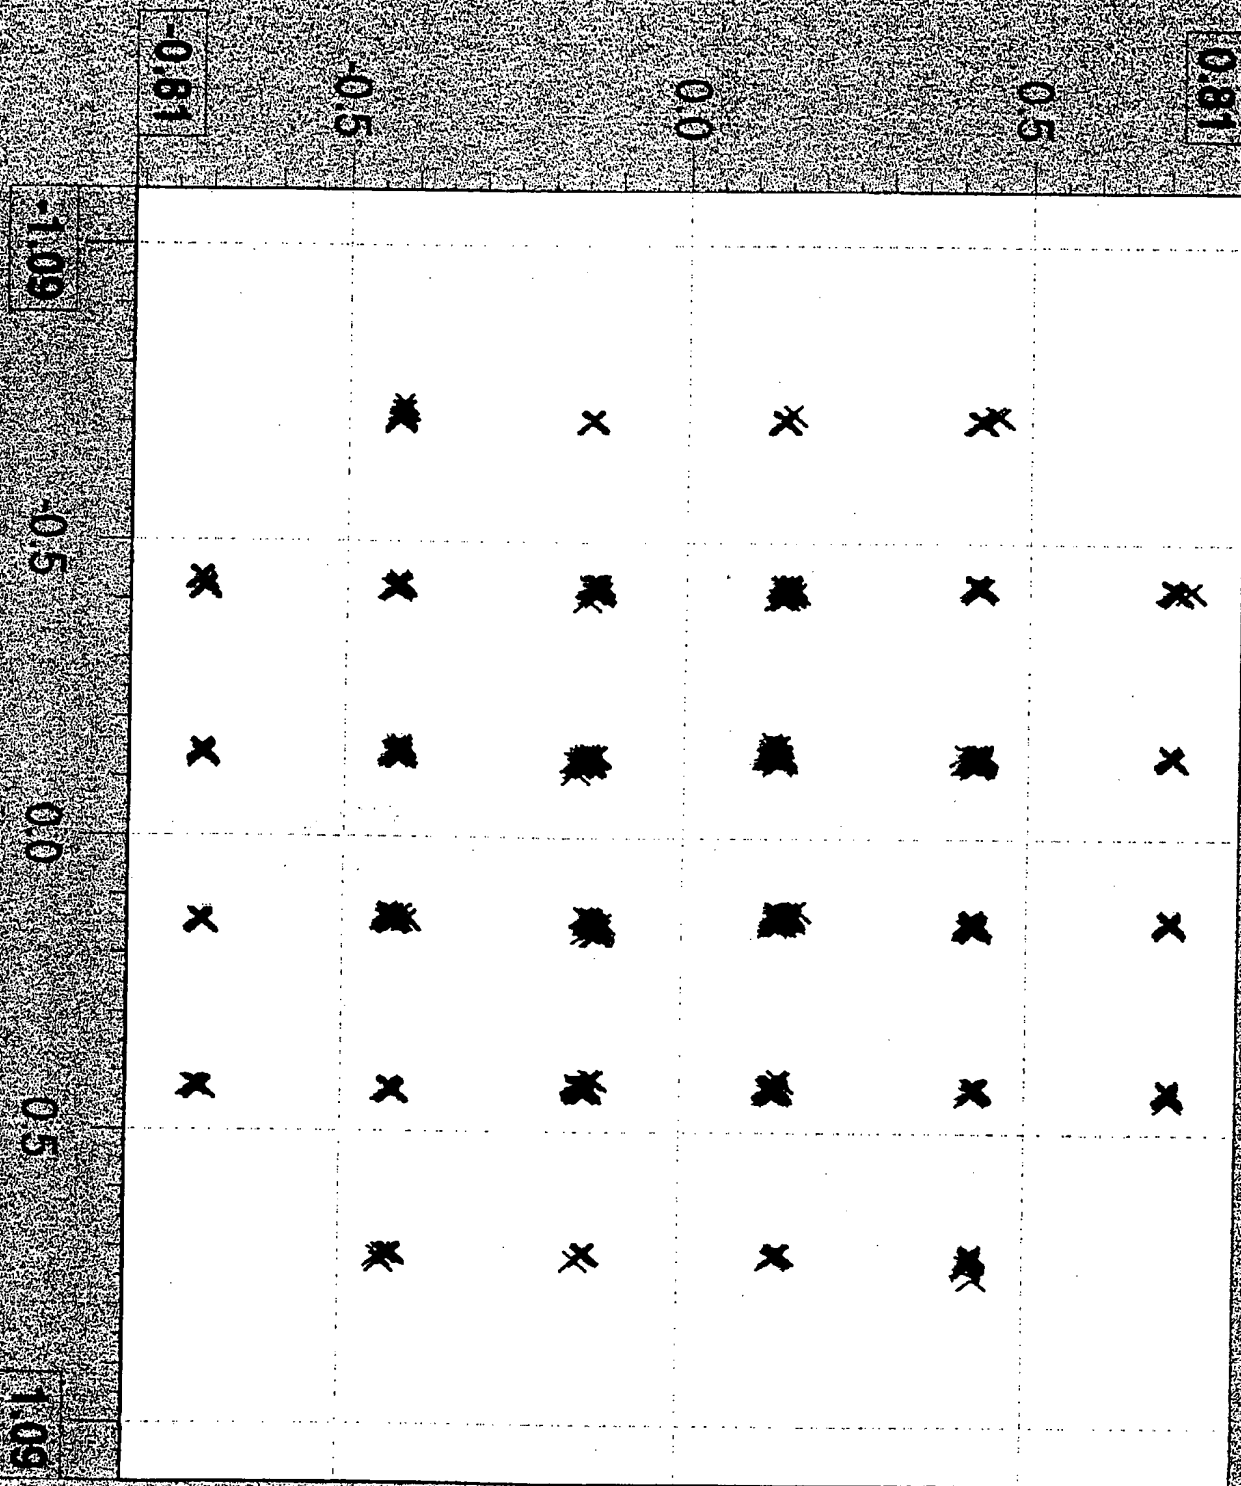

**THIS PAGE BLANK (USPTO)**

BER Comparison of  
16QAM Linear, Static Dynamic Pre-Correction  
8PSK Linear, Non-Linear Static

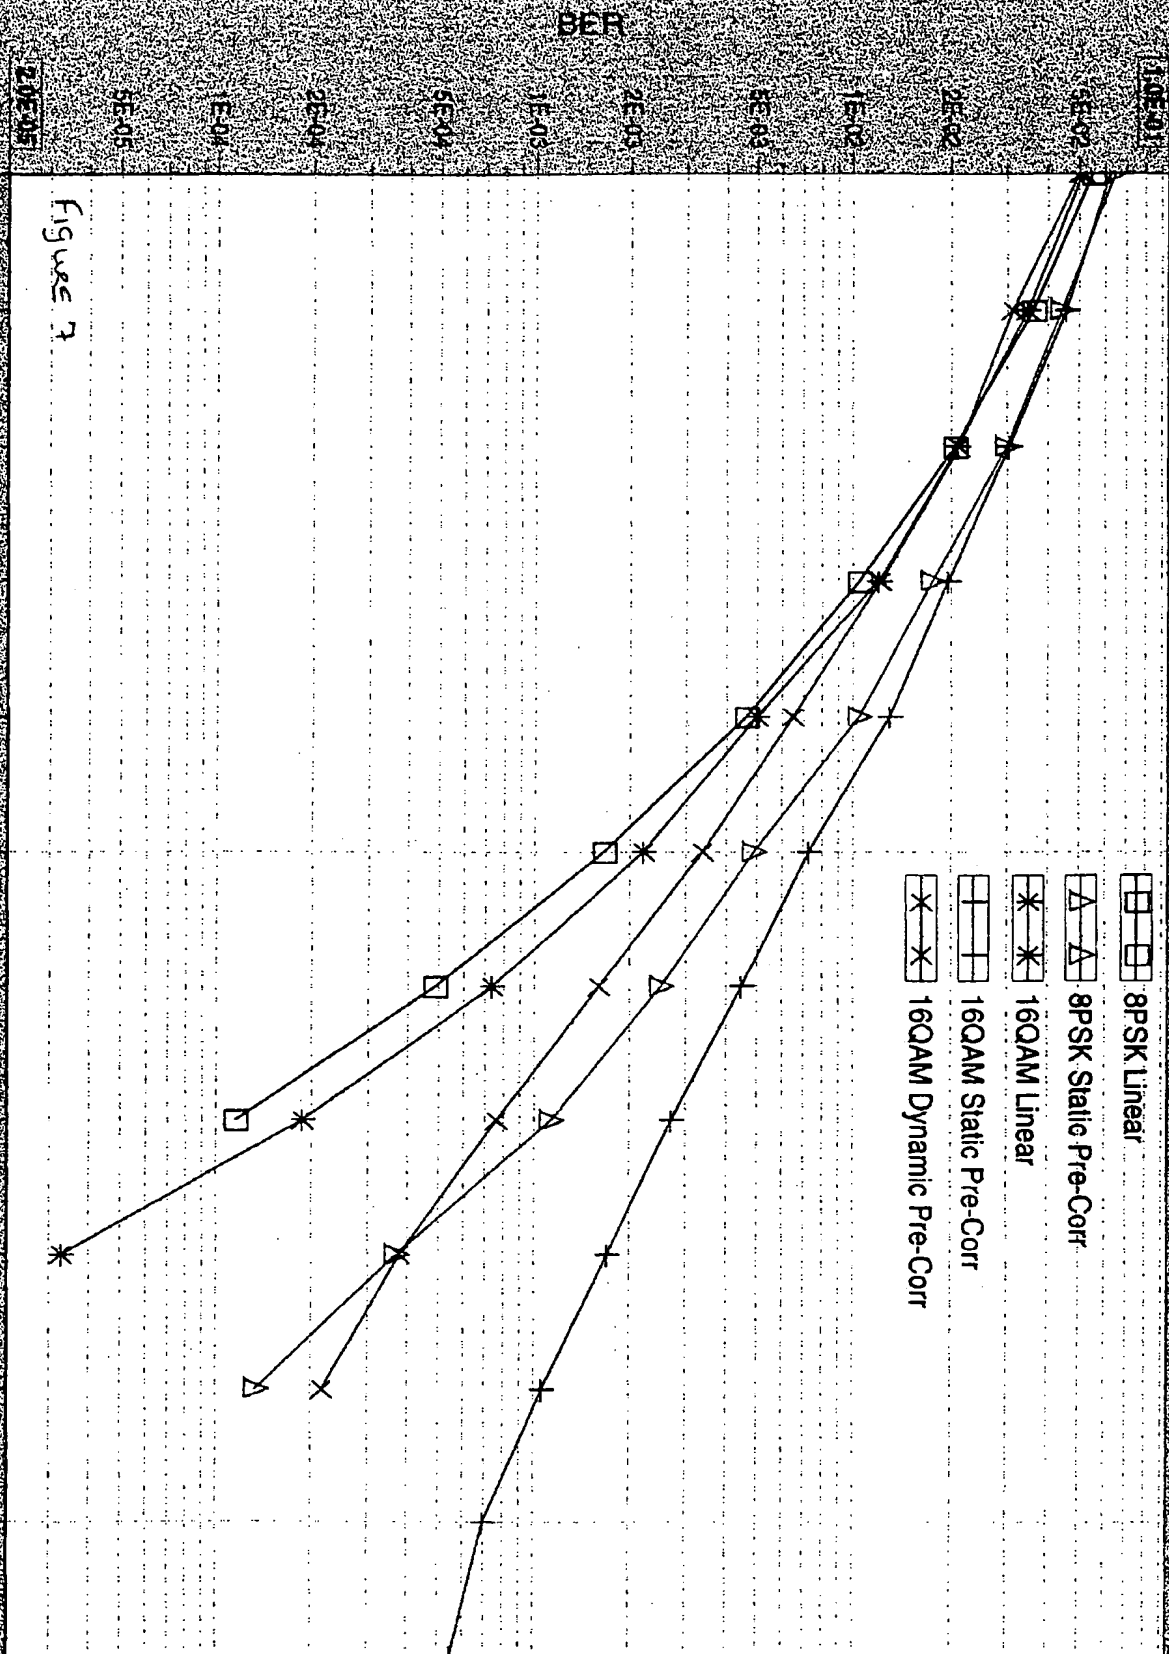


ESB/NO


**THIS PAGE BLANK (USPTO)**



# power spectral density of 32QAM

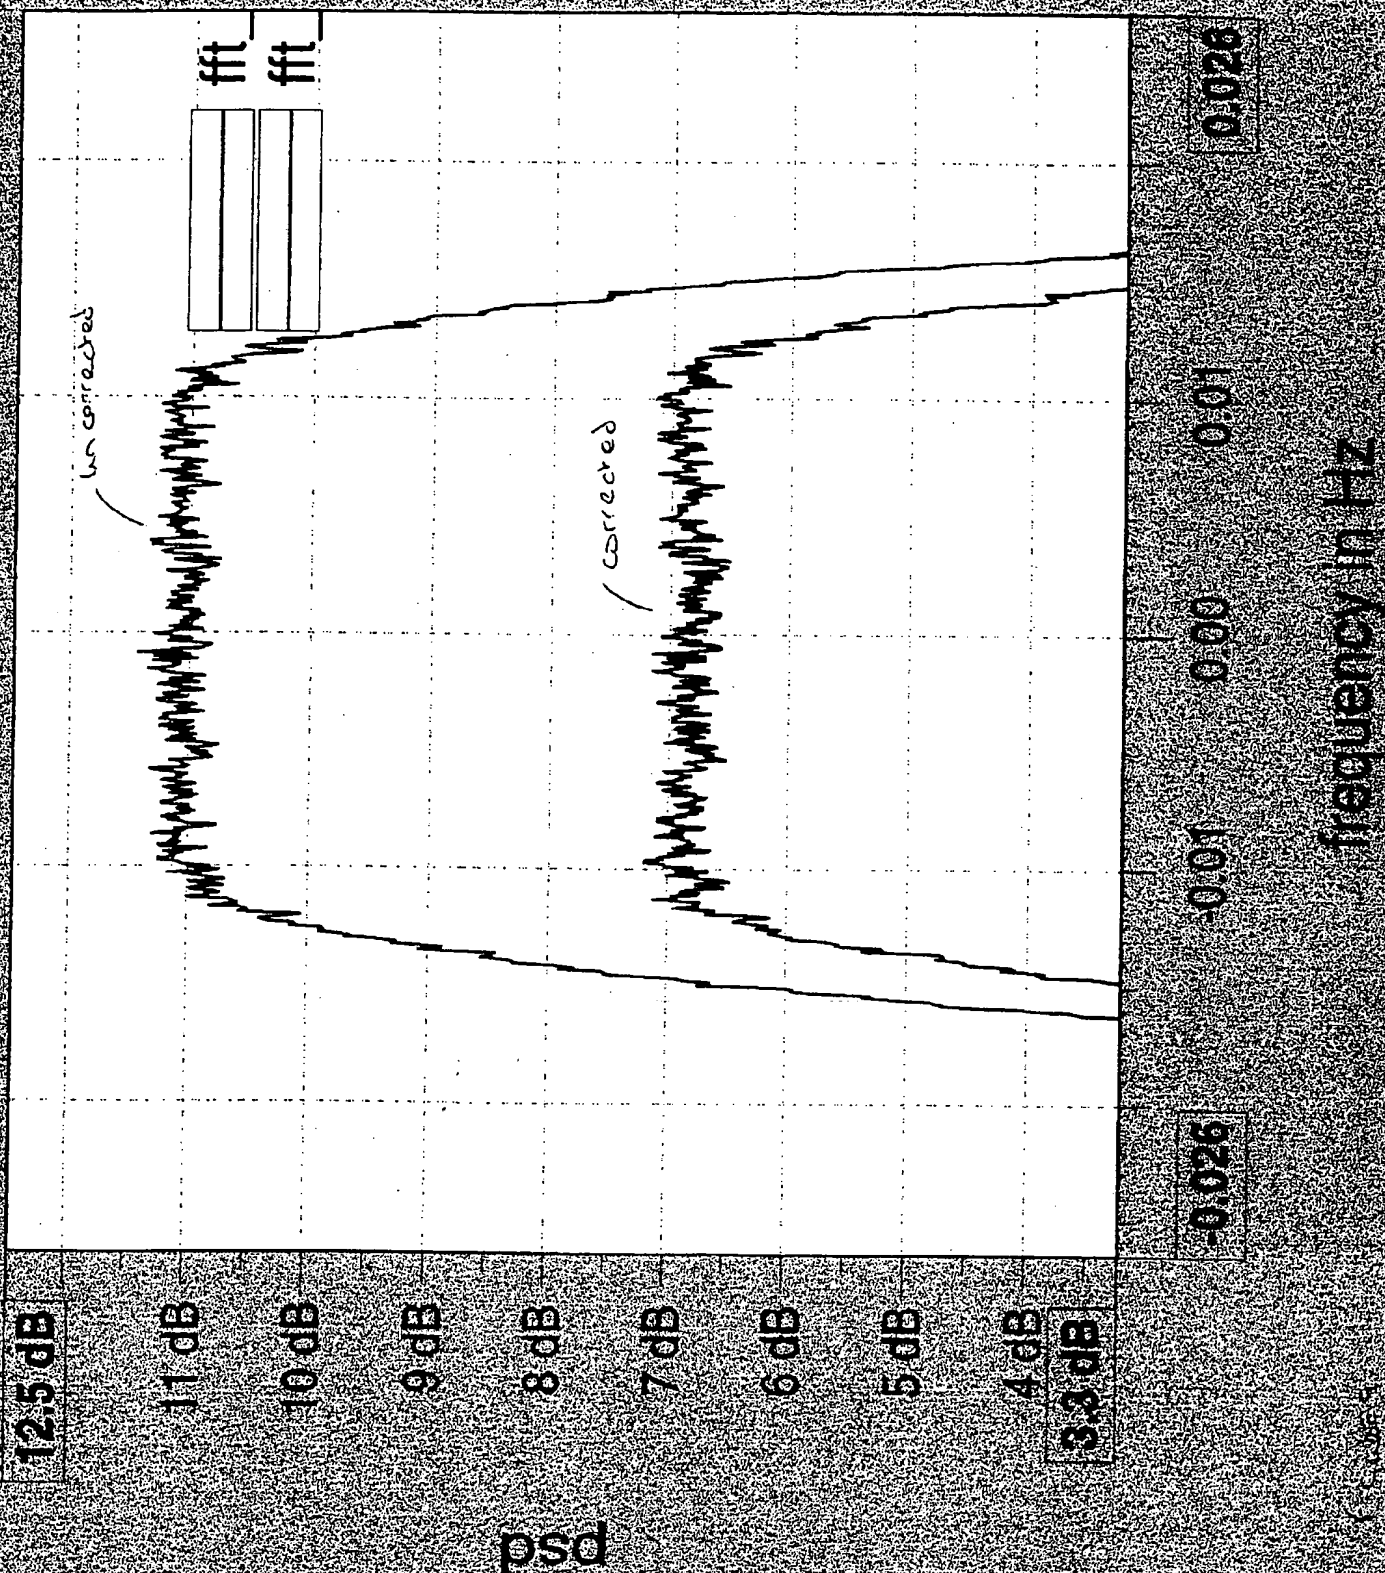

**THIS PAGE BLANK (USPTO)**

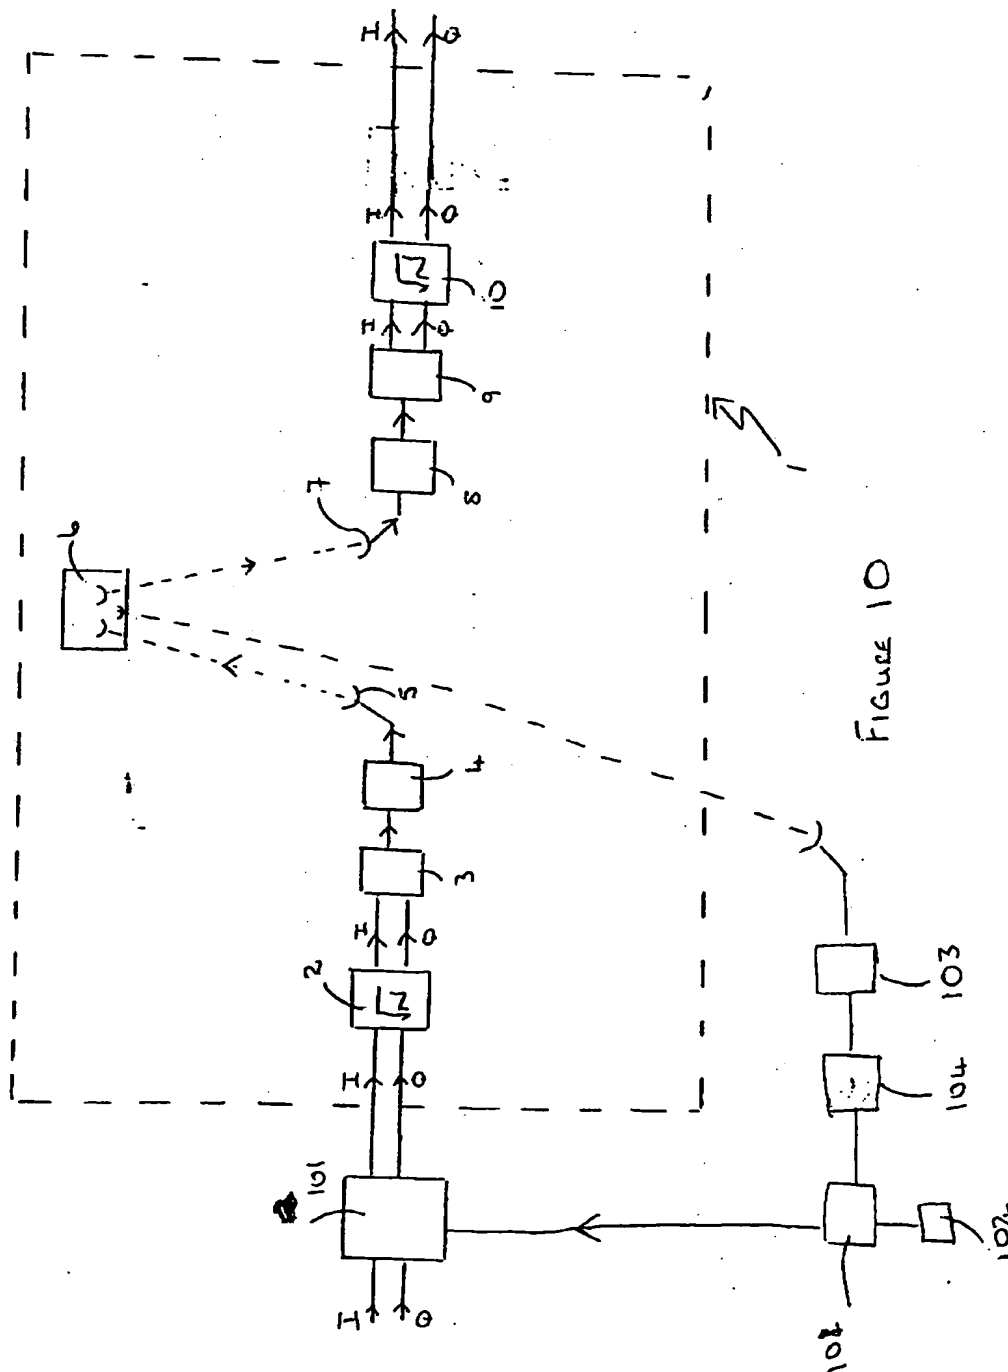

PCT/GB 99/03425

Tandberg Television Ltd.

22.10.99.

**THIS PAGE BLANK (USPTO)**